RoHS Lead-free

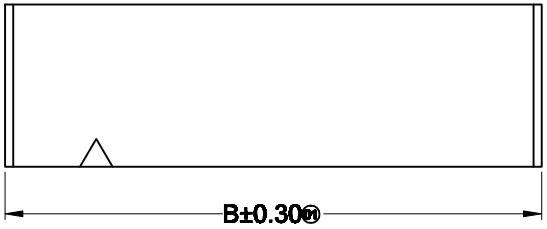

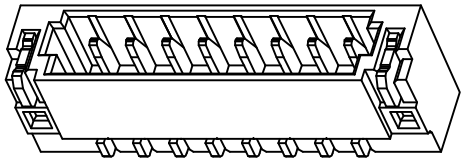

■ Specifications :

- Voltage rating: 30V AC / DC
- Current rating: 0.2A AC / DC
- Withstanding voltage: 200V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤30mΩ

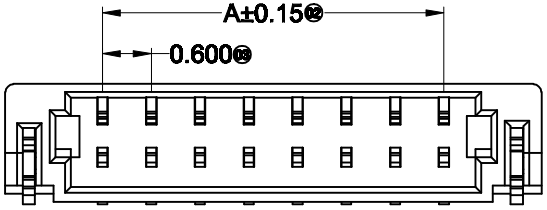

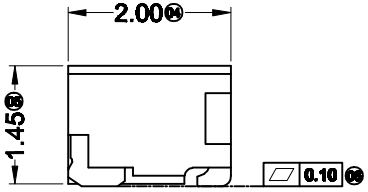

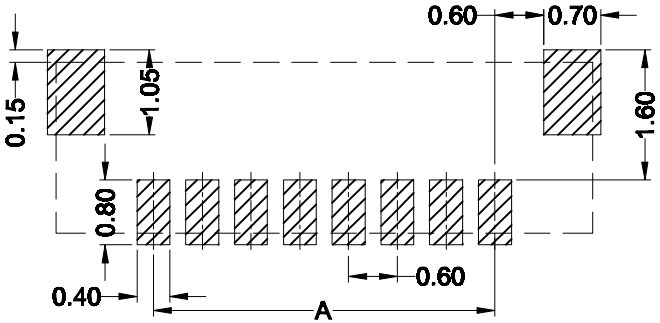

Recommended P.C.B Layout
General Tolerance±0.05

Poles	Dimensions(mm) A	Dimensions(mm) B	Poles	Dimensions(mm) A	Dimensions(mm) B
02	0.60	3.00	12	6.60	9.00
03	1.20	3.60	13	7.20	9.60
04	1.80	4.20	14	7.80	10.20
05	2.40	4.80	15	8.40	10.80
06	3.00	5.40	16	9.00	11.40
07	3.60	6.00	17	9.60	12.00
08	4.20	6.60	18	10.20	12.60
09	4.80	7.20	19	10.80	13.20
10	5.40	7.80	20	11.40	13.80
11	6.00	8.40	22	12.60	14.40

J0600WR-XX	LCP UL 94V-0 (Halogen Free)	Phosphor Bronze	Gold-Flash	Brass	Matte Tin	0600H
PART N0	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Matse With HLB Housing

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL

GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10
PROJECT

东莞市翰皓精密电子有限公司
DONGGUAN HANHAO PRECISION ELECTRONIC CO.,LTD

APPROVAL	CHECK	DRAWN	DATA
Jova	W.X.T	Y.M	2012/08/06

PART NO. J0600WR-XX
TITLE 0.60mm IDC Style Connectors

UNIT	SCALE	NUMBER	REV
MM	1 : 1	A-172	A