


- Specifications :
- Voltage rating: 30V AC / DC
 - Current rating: 0.5A AC / DC
 - Withstanding voltage: 200V AC/minute
 - Temperature range: -25°C~+85°C
 - Insulation resistance: ≥100MΩ
 - Contact resistance: ≤20mΩ
 - After environmental testing : ≤40mΩ

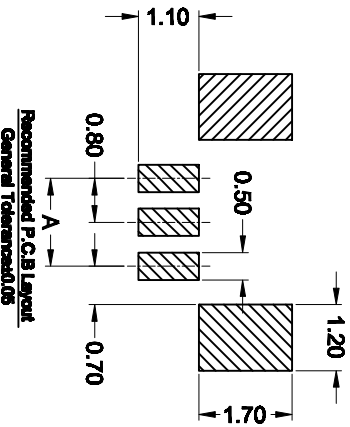

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	0.80	1.80	3.78	12	8.80	8.80	11.78
03	1.60	2.70	4.88	13	8.60	10.70	12.68
04	2.40	3.60	5.98	14	10.40	11.60	13.58
05	3.20	4.50	6.18	15	11.20	12.50	14.18
06	4.00	5.10	6.98	16	12.00	13.10	14.98
07	4.80	6.00	7.78	17	12.80	13.90	16.78
08	5.60	6.70	8.58	18	13.60	14.70	18.58
09	6.40	7.50	9.38	19	14.40	16.50	17.38
10	7.20	8.30	10.18	20	16.20	18.30	18.18
11	8.00	8.10	10.98				

J0800WS-XX	LCP UL 94V-0	Phosphor Bronze	Gold-Finish Ti-Finish	Phosphor Bronze	Gold-Finish Ti-Finish
A0800WS-XX	Material	Material(Pin)	Finish(Pin)	Material (Solder Tab)	Finish (Solder Tab)
PART NO					

东莞市翰皓精密电子有限公司

DONGGUAN HANHAO PRECISION ELECTRONIC CO.,LTD

PART NO. J0800WS-XX

TITLE 0.80 mm IDC Style Connectors

GENERAL TOLERANCE	X ±0.30
PROJECT	XXX ±0.10

APPROVAL	CHECK	DRAWN	DATA
Jacky	Jacky	Sylvia	2015/08/17

UNIT	SCALE	NUMBER	REV
MM	1 : 1	A-016	A

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL