



环保物料

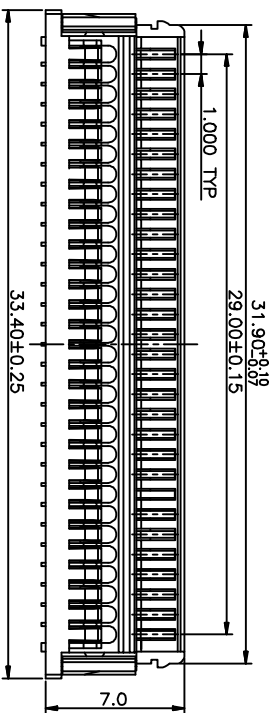


■ Pecifications

- Voltage rating: 50V AC/DC
- Current rating: 1A AC/DC
- Withstanding Voltage: 500V AC/Minute
- Insulation resistance: 100M Ω Min
- Temperature range: -25°C~+85°C
- Contact resistance: Initial Value/40m Ω Max

■ Housing

- Part No.: J1003H-XXP
- Material: Nylon 46 UL94V-0
- Suitable HLB J1003T series Terminal
- Qty: 1,000 Pcs/Bag

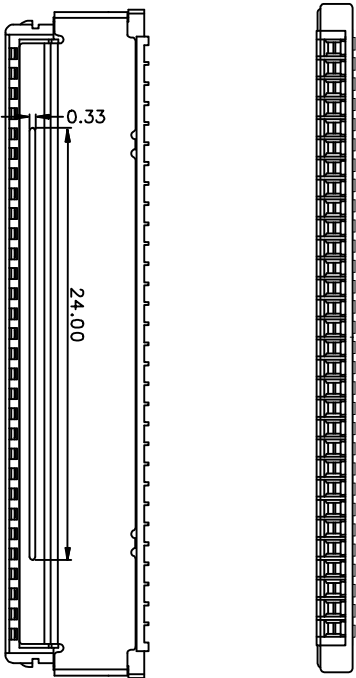

				一般公差				料号 PART NO			
				GENERAL TOLERANCE	±0.3	东莞市翰皓精密电子有限公司				品名 TITLE	J1003H-2*YCX
				.I	±0.3	Dongguan HanHao Precision Electronics Co., Ltd				1.00 mm Crimp Style connectors	
2011/05/14				.II	±0.2	核准 APPD	审核 CHK	绘图 DR	日期 DATA	单位 UNIT	106
				.III	±0.1					比例 SCALE	1/1
										图号 NUMBER	A-106
日期 DATE						审核 CHK				版本 REV	B
				旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION					
				1		2	3	4	5	6	7
											8