
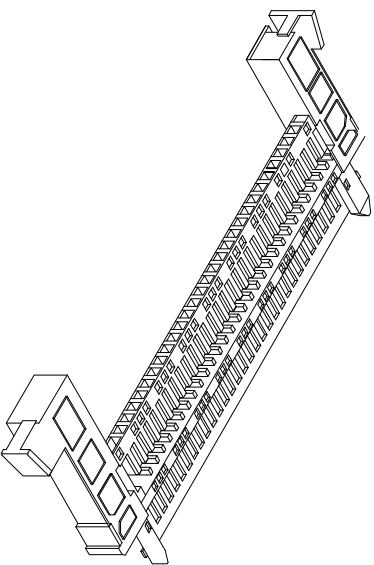





环保物料



- Specifications
- Voltage Rating: 200V AC/DC
 - Current Rating: 1A AC/DC
 - Withstanding Voltage: 500V AC/Minute
 - Insulation Resistance: 100MΩ Min
 - Temperature Range: -25°C~+85°C
 - Contact Resistance: Initial Value/40mΩ Max.

■ Hosing

- Part No.: J1003HC-30
- Material: Nylon 46 UL94V-0
- Suitable J1003T Series Terminal
- Qty: 1,000Pcs/Bag

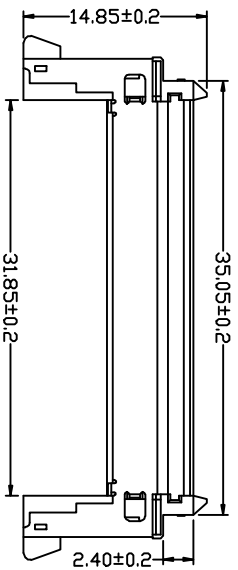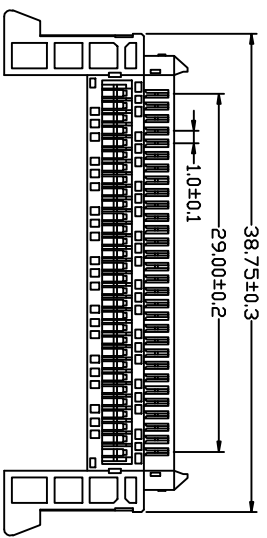

2011/05/14		修改图框格式		东莞市翰皓精密电子有限公司		料号 PART NO		J1003HC-2*YXK	
日期 DATE	旧版本 OLD REV	新版本 NEW REV	变更内容 DESCRIPTION	审核 CHK	批准 APPD	角法 PROJECT	公差 TOLERANCE	批准 APPD	审核 CHK
1	A	B				角法 PROJECT	. I ±0.3 . II ±0.2 . III ±0.1	2007/05/03	日期 DATE
							单位 UNIT	比例 SCALE	图号 NUMBER
							MM	1/1	A-106
							名称 TITLE	解次 REV	B
							1.00 mm Crimp Style connectors		