
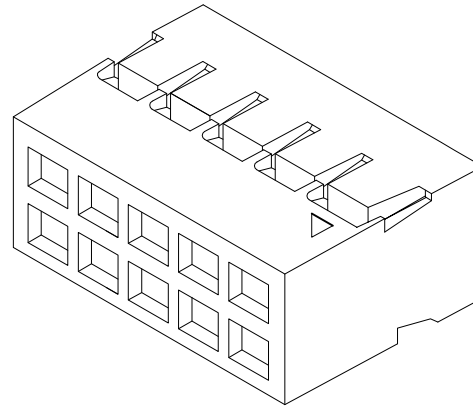


环保物料


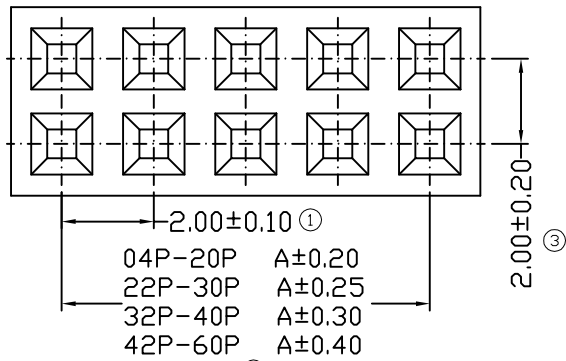


Specifications(规格):

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 2A AC / DC
- Withstanding voltage(耐压值): 1000V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻) ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ

Housing(胶壳)





- Part No. (料号): D2004H-2*XXP
- Poles (PIN数): 04-60
- Material (材质): Nylon 66 (尼龙66) UL 94V-0
- Suitable HLB D2004T Series Terminal
- Mates With HLB PH2000 Series Dual Row Pin Header
- Q' ty (数量): 1,000Pcs/Bag/每袋 (1,000Pcs)

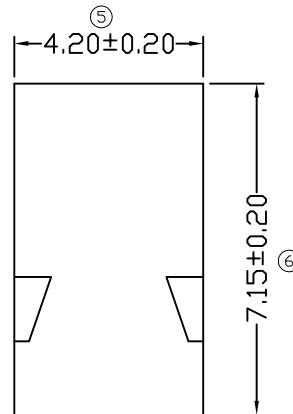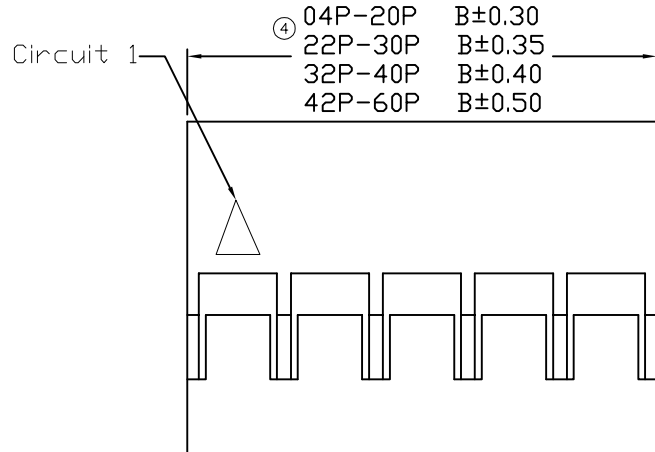

Poles	PART NO.	Dimensions (mm)		Poles	PART NO.	Dimensions (mm)	
		A	B			A	B
4	D2004H-2*2P	2.00	4.20	34	D2004H-2*17P	32.00	34.20
6	D2004H-2*3P	4.00	6.20	36	D2004H-2*18P	34.00	36.20
8	D2004H-2*4P	6.00	8.20	38	D2004H-2*19P	36.00	38.20
10	D2004H-2*5P	8.00	10.20	40	D2004H-2*20P	38.00	40.20
12	D2004H-2*6P	10.00	12.20	42	D2004H-2*21P	40.00	42.20
14	D2004H-2*7P	12.00	14.20	44	D2004H-2*22P	42.00	44.20
16	D2004H-2*8P	14.00	16.20	46	D2004H-2*23P	44.00	46.20
18	D2004H-2*9P	16.00	18.20	48	D2004H-2*24P	46.00	48.20
20	D2004H-2*10P	18.00	20.20	50	D2004H-2*25P	48.00	50.20
22	D2004H-2*11P	20.00	22.20	52	D2004H-2*26P	50.00	52.20
24	D2004H-2*12P	22.00	24.20	54	D2004H-2*27P	52.00	54.20
26	D2004H-2*13P	24.00	26.20	56	D2004H-2*28P	54.00	56.20
28	D2004H-2*14P	26.00	28.20	58	D2004H-2*29P	56.00	58.20
30	D2004H-2*15P	28.00	30.20	60	D2004H-2*30P	58.00	60.20
32	D2004H-2*16P	30.00	32.20				

				一般公差 GENERAL TOLERANCE				东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd				料号 PART NO D2004H-2*XXP			
				.X ±0.3 .XX ±0.2 .XXX ±0.1				核准 APPD 审核 CHK 绘图 DR 日期 DATA				品名 TITLE 2.00 mm Crimp Style connectors			
2011/05/14	A	B	修改图框格式				角法 PROJECT				单位 UNIT 比例 SCALE 图号 NUMBER 版次 REV				
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION				DONG SUCCESS 刘艳 2007/05/03				MM 1/1 A-057 B				

环保物料

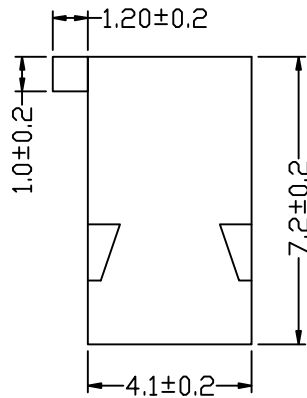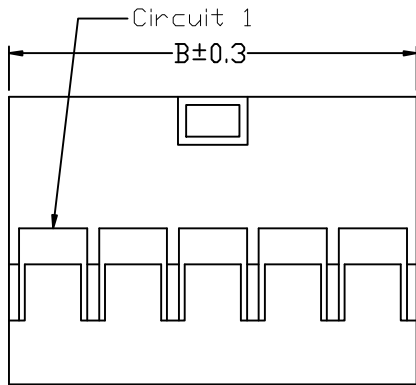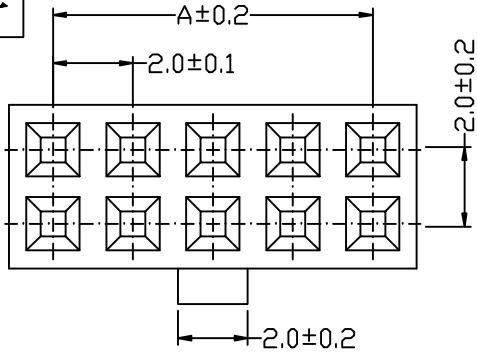

■ Specifications(规格):

- Voltage rating(额定电压): 250V AC/DC
- Current rating(额定电流): 2A AC/DC
- Withstanding voltage(耐压值): 1000V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥1000MΩ
- Contact resistance(接触电阻): ≤20mΩ
- After environmental testing(环境测试后): ≤30mΩ

■ Housing(胶壳)

- Part No. (料号): D2004HA-2*XX
- Poles (PIN数): 04-50
- Material (材质): PBT UL 94V-0
- Suitable HLB D2004T Series Terminal
- Mates with HLB D2004 series dual row Pin Header
- Q'ty (数量): 1,000Pcs/Bag/每袋 (1,000Pcs)

Poles	PART NO.	Dimensions (mm)	
		A	B
4	D2004HA-2*02	2.00	4.20
6	D2004HA-2*03	4.00	6.20
8	D2004HA-2*04	6.00	8.20
10	D2004HA-2*05	8.00	10.20
12	D2004HA-2*06	10.00	12.20
14	D2004HA-2*07	12.00	14.20
16	D2004HA-2*08	14.00	16.20
18	D2004HA-2*09	16.00	18.20
20	D2004HA-2*10	18.00	20.20
22	D2004HA-2*11	20.00	22.20
24	D2004HA-2*12	22.00	24.20
26	D2004HA-2*13	24.00	26.20
28	D2004HA-2*14	26.00	28.20
30	D2004HA-2*15	28.00	30.20
32	D2004HA-2*16	30.00	32.20
34	D2004HA-2*17	32.00	34.20
36	D2004HA-2*18	34.00	36.20
38	D2004HA-2*19	36.00	38.20
40	D2004HA-2*20	38.00	40.20
42	D2004HA-2*21	40.00	42.20
44	D2004HA-2*22	42.00	44.20
46	D2004HA-2*23	44.00	46.20
48	D2004HA-2*24	46.00	48.20
50	D2004HA-2*25	48.00	50.20

Poles	PART NO.	Dimensions (mm)		Poles	PART NO.	Dimensions (mm)	
		A	B			A	B
4	4601H00-2*02PA-A	2.00	4.20	28	4601H00-2*14PA-A	26.00	28.20
6	4601H00-2*03PA-A	4.00	6.20	30	4601H00-2*15PA-A	28.00	30.20
8	4601H00-2*04PA-A	6.00	8.20	32	4601H00-2*16PA-A	30.00	32.20
10	4601H00-2*05PA-A	8.00	10.20	34	4601H00-2*17PA-A	32.00	34.20
12	4601H00-2*06PA-A	10.00	12.20	36	4601H00-2*18PA-A	34.00	36.20
14	4601H00-2*07PA-A	12.00	14.20	38	4601H00-2*19PA-A	36.00	38.20
16	4601H00-2*08PA-A	14.00	16.20	40	4601H00-2*20PA-A	38.00	40.20
18	4601H00-2*09PA-A	16.00	18.20	42	4601H00-2*21PA-A	40.00	42.20
20	4601H00-2*10PA-A	18.00	20.20	44	4601H00-2*22PA-A	42.00	44.20
22	4601H00-2*11PA-A	20.00	22.20	46	4601H00-2*23PA-A	44.00	46.20
24	4601H00-2*12PA-A	22.00	24.20	48	4601H00-2*24PA-A	46.00	48.20
26	4601H00-2*13PA-A	24.00	26.20	50	4601H00-2*25PA-A	48.00	50.20

一般公差
GENERAL TOLERANCE
.X ±0.3
.XX ±0.2
.XXX ±0.1

东莞市翰皓精密电子有限公司
Dongguan HanHao Precision Electronics Co.,Ltd

料号 PART NO
D2004HA-2*XX

品名 TITLE
2.00 mm Crimp Style connectors

单位 UNIT
MM

比例 SCALE
1/1

图号 NUMBER
A-106





版次 REV
B

核准 APPD 审核 CHK 绘图 DR 日期 DATA

SUCCESS 刘艳 2007/05/03

日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD
2011/05/14	A	B	修改图框格式		

环保物料

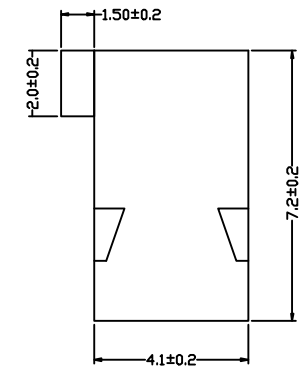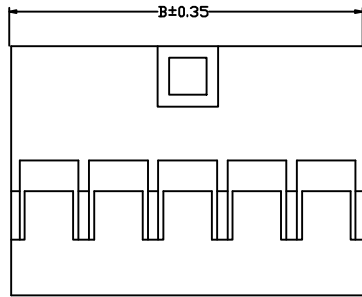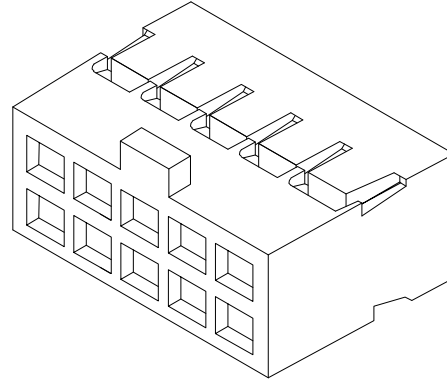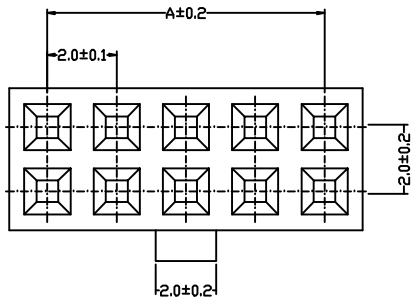

Poles	PART NO.	Dimensions (mm)	
		A	B
4	D2004HB-2*02	2.00	4.30
6	D2004HB-2*03	4.00	6.30
8	D2004HB-2*04	6.00	8.30
10	D2004HB-2*05	8.00	10.30
12	D2004HB-2*06	10.00	12.30
14	D2004HB-2*07	12.00	14.30
16	D2004HB-2*08	14.00	16.30
18	D2004HB-2*09	16.00	18.30
20	D2004HB-2*10	18.00	20.30
22	D2004HB-2*11	20.00	22.30
24	D2004HB-2*12	22.00	24.30
26	D2004HB-2*13	24.00	26.30
28	D2004HB-2*14	26.00	28.30
30	D2004HB-2*15	28.00	30.30
32	D2004HB-2*16	30.00	32.30
34	D2004HB-2*17	32.00	34.30
36	D2004HB-2*18	34.00	36.30
38	D2004HB-2*19	36.00	38.30
40	D2004HB-2*20	38.00	40.30
42	D2004HB-2*21	40.00	42.30
44	D2004HB-2*22	42.00	44.30
46	D2004HB-2*23	44.00	46.30
48	D2004HB-2*24	46.00	48.30
50	D2004HB-2*25	48.00	50.30

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000MΩmin
- Temperature range: -25°C~+85°C
- Contact resistance: Intial value/20mΩmax
- After enviornment testing/20mΩmax

■ HOUSING

- Part No.: D2004HB-2*XX
- Poles: 04-50
- Material: PBT UL 94V-0
- Suitable HLB D2004T series Terminal
- Mates with HLB D2004 series dual row Pin Header
- Q'ty: 1000pcs/bag

				一般公差 GENERAL TOLERANCE .X ±0.3 .XX ±0.2 .XXX ±0.1				东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd				料号 PART NO D2004HB-2*XX							
2011/05/14 A B 修改图框格式								核准 APPD 审核 CHK 绘图 DR 日期 DATA		品名 TITLE 2.00 mm Crimp Style connectors									
日期 DATE 旧版次 OLD REV 新版次 NEW REV		变更内容 DESCRIPTION		审核 CHK 核准 APPD		角注 PROJECT 		SUCCESS 对枪		2007/05/03		单位 UNIT MM		比例 SCALE 1/1		图号 NUMBER A-057		版次 REV B	

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

F




E

D

C

B

A

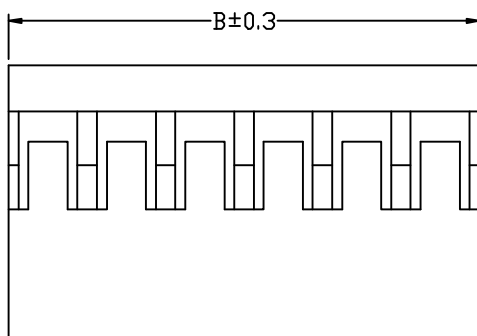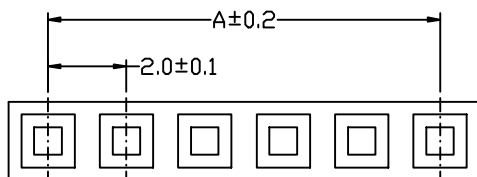

■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 1000MΩmin
- Temperature range: -25°C~+85°C
- Contact resistance: Intial value/10mΩmax
- After enviornmental testing/20mΩmax

■ HOUSING

- Part No.: D2004H
- Poles: 02-20
- Material: PBT
- Q'ty: 1000pcs/bag

Poles	Part No	Dimensions (mm)	
		A	B
2	D2004H-02	2.00	4.20
3	D2004H-03	4.00	6.20
4	D2004H-04	6.00	8.20
5	D2004H-05	8.00	10.20
6	D2004H-06	10.00	12.20
7	D2004H-07	12.00	14.20
8	D2004H-08	14.00	16.20
9	D2004H-09	16.00	18.20
10	D2004H-10	18.00	20.20
11	D2004H-11	20.00	22.20
12	D2004H-12	22.00	24.20
13	D2004H-13	24.00	26.20
14	D2004H-14	26.00	28.20
15	D2004H-15	28.00	30.20
16	D2004H-16	30.00	32.20
17	D2004H-17	32.00	34.4
18	D2004H-18	34.00	36.20
19	D2004H-19	36.00	38.20
20	D2004H-20	38.00	40.20

							GENERAL TOLERANCE X ±0.30 XX ±0.20 XXX ±0.10				东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd			
							APPROVAL CHECK DRAWN DATA Smark Yu wei Liu Yan 2011/05/22							
2011/05/22	A	B	/	Modify frame format	Jova	Jova Lau								
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	UNIT	SCALE	NUMBER	REV			
1							⊕	mm	1:1	8	B			

1 | 2 | 3 | 4 | 5 | 6 | 7 | 8

F

E







D

C

B

A

环保物料

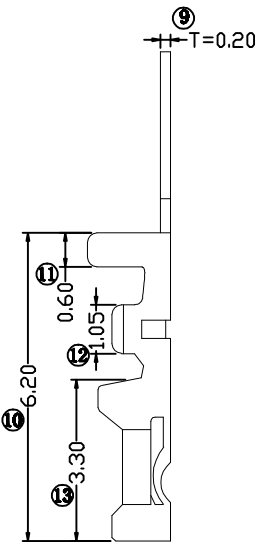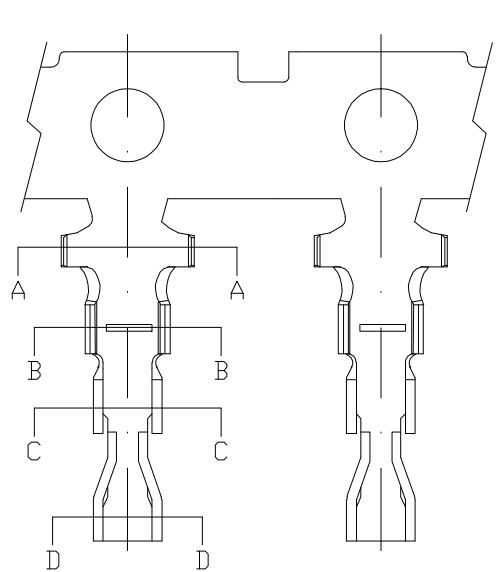

Specifications

- Voltage Rating: 250V AC / DC
- Current Rating: 2A AC / DC
- Withstand Voltage: 1000V AC/minute.
- Insulation Resistance: 1000MΩ Min.
- Temperature Range: -25°C ~ +85°C
(Including temperature rise in applying electrical current)
- Applicable PC Board thickness: .063"(1.6mm)
- Contact resistance: Initial Value/20mΩ Max. after Environmental Testing/20mΩ Max.
- Used in HLB D2004H Series Housing

Ordering Information & Specifications:

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
D2004T	AWG#26-#30	1.40mm(max)	Brass	Gold-flash	10,000pcs
D2004TP	AWG#26-#30	1.40mm(max)	Brass	Tin-plated	10,000pcs
D2004TQ	AWG#26-#30	1.40mm(max)	Phosphor Bronze	Gold-flash	10,000pcs

					<p>一般公差 GENERAL TOLERANCE</p> <p>.X ±0.3</p> <p>.XX ±0.2</p> <p>.XXX ±0.1</p>				<p>东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd</p>				<p>料号 PART NO D2004T</p>			
									<p>品名 TITLE 2.00 mm Crimp Style connectors</p>							
2011/05/14	A	B	修改图框格式						核准 APPD	审核 CHK	绘图 DR	日期 DATA				
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION		审核 CHK	核准 APPD	角注 PROJECT	DONG	SUCCESS	刘艳	2007/05/03	单位 UNIT	比例 SCALE	图号 NUMBER	版次 REV	
							⊕					MM	1/1	A-057	B	