
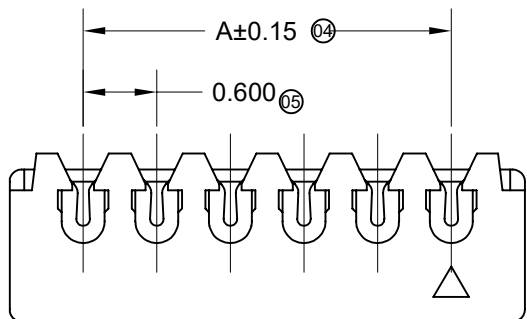
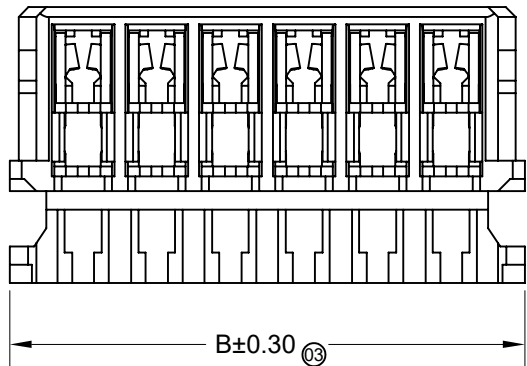
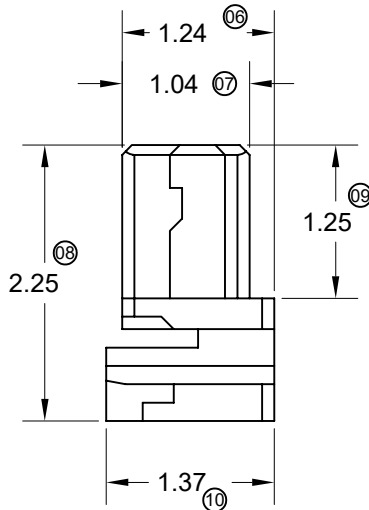
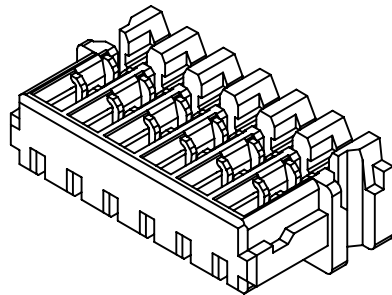


RoHS

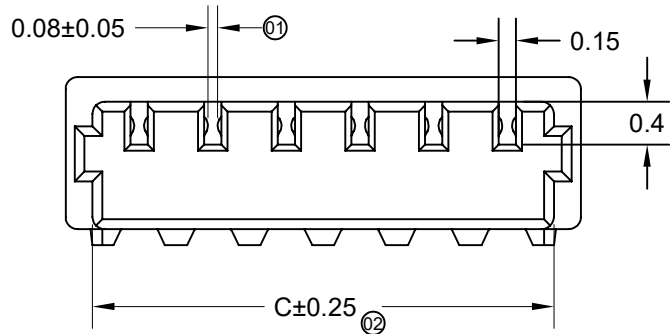

Specifications :

- Voltage rating(额定电压): 30V AC / DC
- Current rating(额定电流): 0.2A AC / DC
- Withstanding voltage(耐压值): 200V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥100MΩ
- Contact resistance(接触电阻): ≤30mΩ
- After environmental testing(环境测试后): ≤40mΩ

- Wire Range:AWG#36/AWG#34
- Insulation O.D.:0.32mm(Max)

Poles	Dimensions(mm)		
	A	B	C
02	0.60	1.80	1.35
03	1.20	2.40	1.95
04	1.80	3.00	2.55
05	2.40	3.60	3.15
06	3.00	4.20	3.75
07	3.60	4.80	4.35
08	4.20	5.40	4.95
09	4.80	6.00	5.55
10	5.40	6.60	6.15
11	6.00	7.20	6.75
12	6.60	7.80	7.35
13	7.20	8.40	7.95
14	7.80	9.00	8.55
15	8.40	9.60	9.15
16	9.00	10.20	9.75
17	9.60	10.80	10.35
18	10.20	11.40	10.95
19	10.80	12.00	11.55
20	11.40	12.60	12.15
21	12.00	13.20	12.75
22	12.60	13.80	13.35






J 06 00 H - XX - XX B P
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Letter: JST
- ② Series No.: 0.60 MM
- ③ Code Name
- ④ Category: H-Housing
- ⑤ Row No.-Pin No: Single Row
XX-Single Row 02Pin~22PIN
- ⑥ Plastic Material: XX- PAXX, UL94V-0, LP- LCP, UL94V-0
- ⑦ Color: N-White, R-Red, B-Black, L-Blue
- ⑧ Metallic Material: P-Phosphor Bronze(Terminal)

							GENERAL TOLERANCE		东莞市翰皓精密电子有限公司 DONGGUAN HANHAO PRECISION ELECTRONIC CO.,LTD				PART NO. J0600H-XX			
							.X ±0.30	±0.20					TITLE 0.60 mm Pitch IDC Connectors			
							.XX ±0.20	±0.10	APPROVAL				UNIT			
							.XXX ±0.10		CHECK				SCALE			
									DRAWN				NUMBER			
									DATE				REV			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT		XU	L.Q.F	LI	2025/06/18	MM	1 : 1	A-198	A

RoHS

- Specifications :
- Voltage rating(额定电压): 30V AC / DC
 - Current rating(额定电流): 0.2A AC / DC
 - Withstanding voltage(耐压值): 200V AC/minute
 - Temperature range(工作温度): -25°C~+85°C
 - Insulation resistance(绝缘电阻): ≥100MΩ
 - Contact resistance(接触电阻): ≤30mΩ

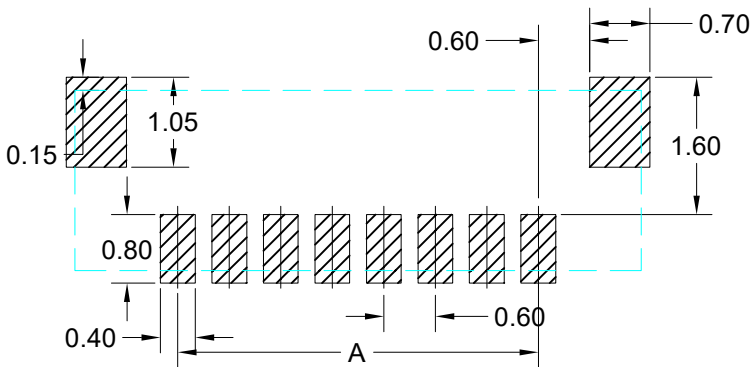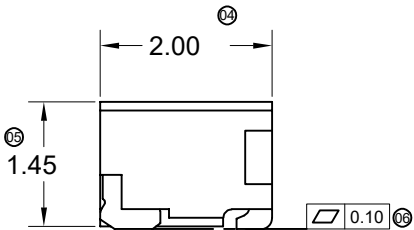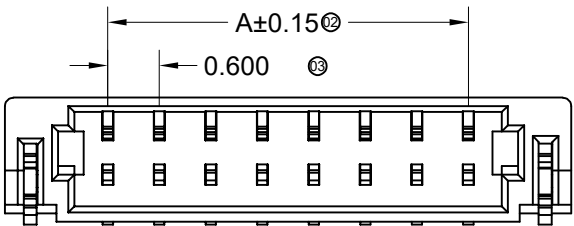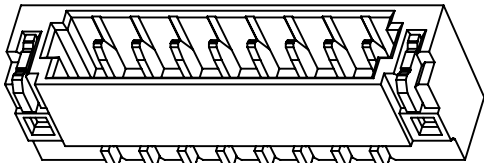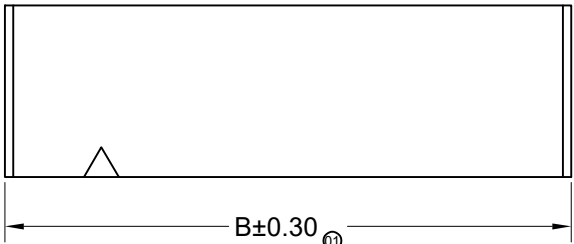

Recommended P.C.B Layout
General Tolerance±0.05






J 06 00 W R S - XX - LP B PB GT
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

- ① Letter: JST
② Series No.: 0.60 MM
③ Code Name
④ Category: W-Wafer
⑤ Welding Board Angle: Right Angle 90°
⑥ Welding form: S-SMT
⑦ Row No.-Pin No: Single Row
XX-Single Row 02Pin~22PIN
⑧ Plastic Material: XX- PAXX, UL94V-0, LP- LCP, UL94V-0
⑨ Color: N-White, R-Red, B-Black, L-Blue
⑩ Metallic Material: P-Phosphor Bronze(Pin)
B-Brass(Solder Tabs)
⑪ Plating Code: Gold-Flash(Pin)
Matte-Tin(Solder Tabs)

Poles	Dimensions(mm)	
	A	B
02	0.60	3.00
03	1.20	3.60
04	1.80	4.20
05	2.40	4.80
06	3.00	5.40
07	3.60	6.00
08	4.20	6.60
09	4.80	7.20
10	5.40	7.80
11	6.00	8.40
12	6.60	9.00
13	7.20	9.60
14	7.80	10.20
15	8.40	10.80
16	9.00	11.40
17	9.60	12.00
18	10.20	12.60
19	10.80	13.20
20	11.40	13.80
21	12.00	14.40
22	12.60	15.00

							GENERAL TOLERANCE	东莞市翰皓精密电子有限公司				PART NO.			
							.X ±0.30 .XX ±0.20 .XXX ±0.10	DONGGUAN HANHAO PRECISION ELECTRONIC CO.,LTD				J0600WRS-XX			
								APPROVAL	CHECK	DRAWN	DATE	TITLE			
												0.60 mm Pitch IDC Connectors			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT	XU	L.Q.F	LI	2025/06/14	UNIT	SCALE	NUMBER	REV
												MM	1 : 1	A-198	A

RoHS

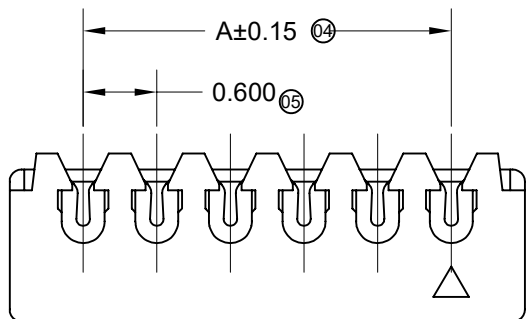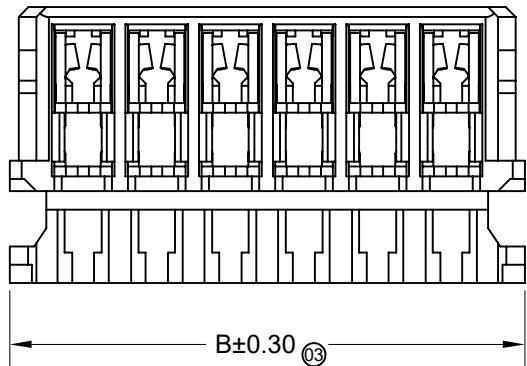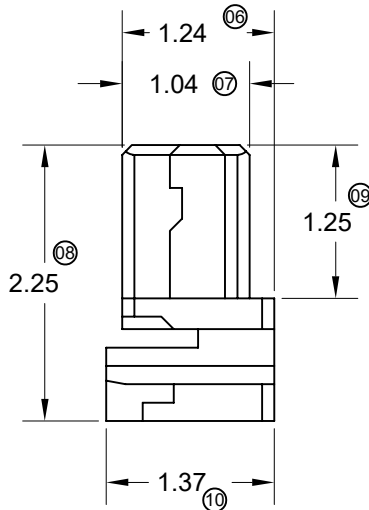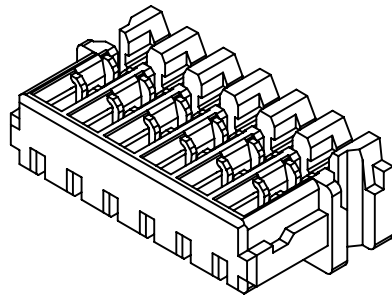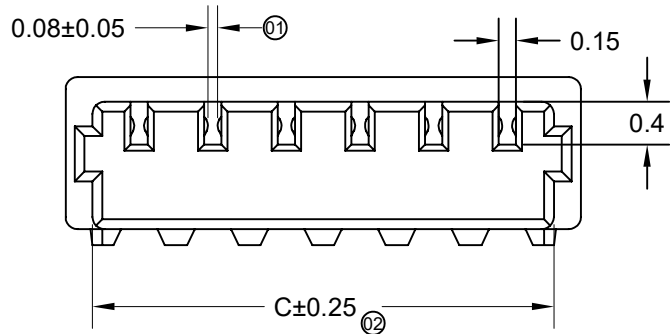

Specifications :

- Voltage rating(额定电压): 30V AC / DC
- Current rating(额定电流): 0.2A AC / DC
- Withstanding voltage(耐压值): 200V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): ≥100MΩ
- Contact resistance(接触电阻): ≤30mΩ
- After environmental testing(环境测试后): ≤40mΩ

- Wire Range:AWG#36/AWG#34
- Insulation O.D.:0.32mm(Max)

Poles	Dimensions(mm)		
	A	B	C
02	0.60	1.80	1.35
03	1.20	2.40	1.95
04	1.80	3.00	2.55
05	2.40	3.60	3.15
06	3.00	4.20	3.75
07	3.60	4.80	4.35
08	4.20	5.40	4.95
09	4.80	6.00	5.55
10	5.40	6.60	6.15
11	6.00	7.20	6.75
12	6.60	7.80	7.35
13	7.20	8.40	7.95
14	7.80	9.00	8.55
15	8.40	9.60	9.15
16	9.00	10.20	9.75
17	9.60	10.80	10.35
18	10.20	11.40	10.95
19	10.80	12.00	11.55
20	11.40	12.60	12.15
21	12.00	13.20	12.75
22	12.60	13.80	13.35

J 06 00 H - XX - XX B P
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Letter: JST
- ② Series No.: 0.60 MM
- ③ Code Name
- ④ Category: H-Housing
- ⑤ Row No.-Pin No: Single Row
XX-Single Row 02Pin~22PIN
- ⑥ Plastic Material: XX- PAXX, UL94V-0, LP- LCP, UL94V-0
- ⑦ Color: N-White, R-Red, B-Black, L-Blue
- ⑧ Metallic Material: P-Phosphor Bronze(Terminal)

							GENERAL TOLERANCE		东莞市翰皓精密电子有限公司 DONGGUAN HANHAO PRECISION ELECTRONIC CO.,LTD				PART NO. J0600H-XX			
							.X ±0.30	±0.20					TITLE 0.60 mm Pitch IDC Connectors			
							.XX ±0.20	±0.10	APPROVAL				UNIT			
							.XXX ±0.10		CHECK				SCALE			
									DRAWN				NUMBER			
									DATE				REV			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT		XU	L.Q.F	LI	2025/06/18	MM	1 : 1	A-198	A