

RoHS

■ Specifications :

- Voltage rating(额定电压): 250V AC / DC
- Current rating(额定电流): 3A AC / DC
- Withstanding voltage(耐压值): 800V AC/minute
- Temperature range(工作温度): -25°C~+85°C
- Insulation resistance(绝缘电阻): $\geq 1000\text{M}\Omega$
- Contact resistance(接触电阻): $\leq 20\text{m}\Omega$

H 20 10 H - XX - 66 X
① ② ③ ④ ⑤ ⑥ ⑦

① Letter: HIROSE

② Series No.: 2.00 MM

③ Code Name

④ Category: H-Housing

⑤ Row No.-Pin No: Dual Row

XX- 2*2Pin~2*18PIN, 2*20PIN



⑥Plastic Material: XX- PAXX, UL94V-0, LP- LCP, UL94V-0

⑦ Color: N-White, R-Red, B-Black, L-Blue

Poles	Dimensions(mm)	
	A	B
04	2.00	6.00
06	4.00	8.00
08	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
40	38.00	42.00

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	东莞市翰皓精密电子有限公司 DONGGUAN HANHAO PRECISION ELECTRONIC CO.,LTD				PART NO.			
						H2010H-XX									
								APPROVAL	CHECK	DRAWN	DATA	TITLE			
								2.00 mm Pitch Connectors							
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	XU	L.Q.F	LI	2025/06/18	UNIT MM	SCALE 1 : 1	NUMBER A-198	REV A


RoHS

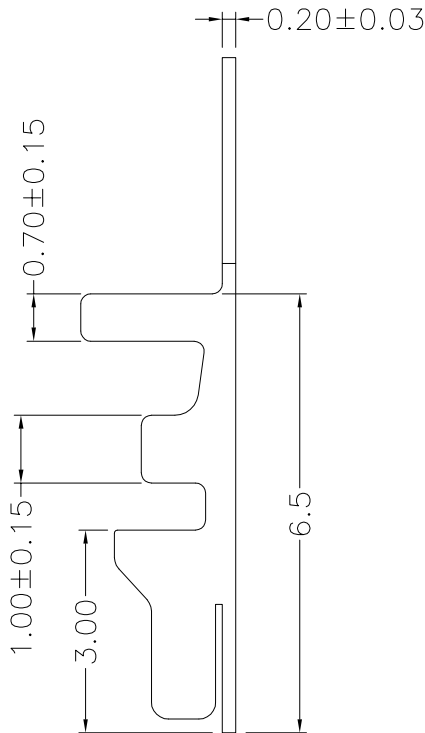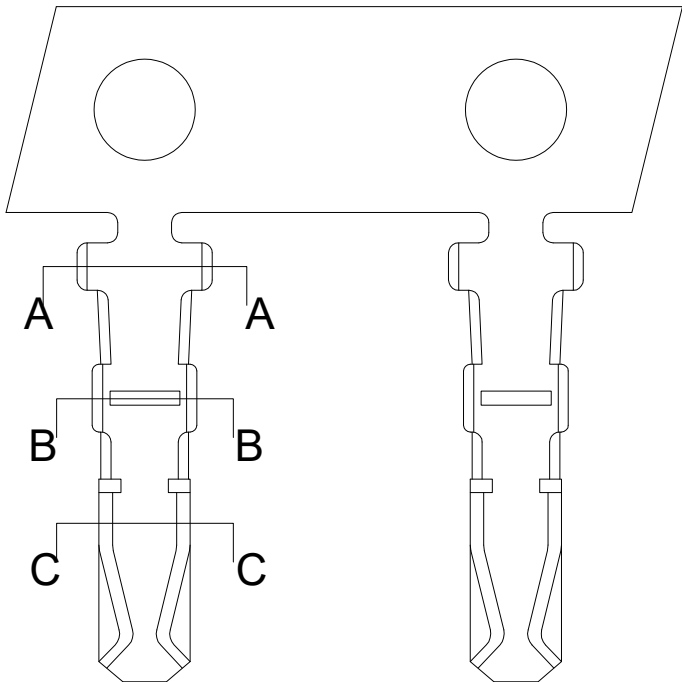


- Specifications :
- Wire Range: AWG#24-#28
 - OD:1.40mm Max
 - Q'TY:10000 Pcs/Reel

H 20 10 T P X
① ② ③ ④ ⑤ ⑥


- ① Letter: HIROSE
② Series No.: 2.00 MM
③ Code Name
④ Category: T-Terminal
⑤ Material: P- Phosphor bronze
⑥ Plating Code: Tin Plated



A-A

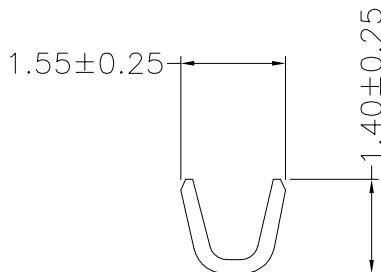

B-B



C-C

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	东莞市翰皓精密电子有限公司 DONGGUAN HANHAO PRECISION ELECTRONIC CO.,LTD				PART NO. H2010T			
												TITLE 2.00 mm Pitch Terminal			
								APPROVAL	CHECK	DRAWN	DATA	UNIT	SCALE	NUMBER	REV
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	XU	L.Q.F	LI	2025/06/18	MM	1 : 1	A-198	A