

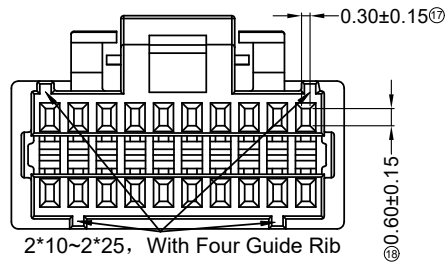

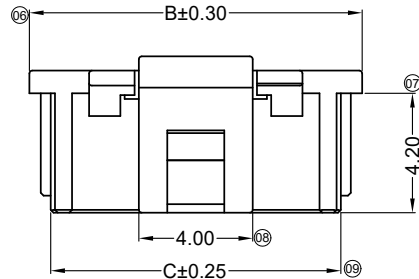



环保物料

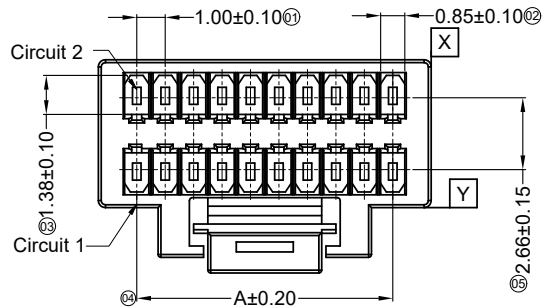

Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ
- Mates With HHB Terminal 1001T


Poles	Dimensions (mm)		
	A	B	C
2x08	7.00	9.70	8.30
2x10	9.00	11.70	10.30
2x12	11.00	13.70	12.30
2x13	12.00	14.70	13.30
2x14	13.00	15.70	14.30
2x15	14.00	16.70	15.30
2x18	17.00	19.70	18.30
2x20	19.00	21.70	20.30
2x25	24.00	26.70	25.30

				一般公差 GENERAL TOLERANCE		东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd				料号 PART NO M1001H-2*XX			
				.X ±0.3 .XX ±0.2 .XXX ±0.1		核准 APPD 审核 CHK 绘图 DR 日期 DATA				品名 TITLE 1.00mm Crimp Style Connectors			
2011/05/14	A	B	修改图框格式										
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT 	SUCCESS	刘艳	2007/05/03	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER A-069	版次 REV B

环保物料



Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 100M\Omega$
- Contact resistance: $\leq 20m\Omega$
- After environmental testing: $\leq 40m\Omega$
- Wire Range: AWG#28~32
- Insulation O.D: 0.80mm(Max)
- Mates With HHB Housing : 1001H



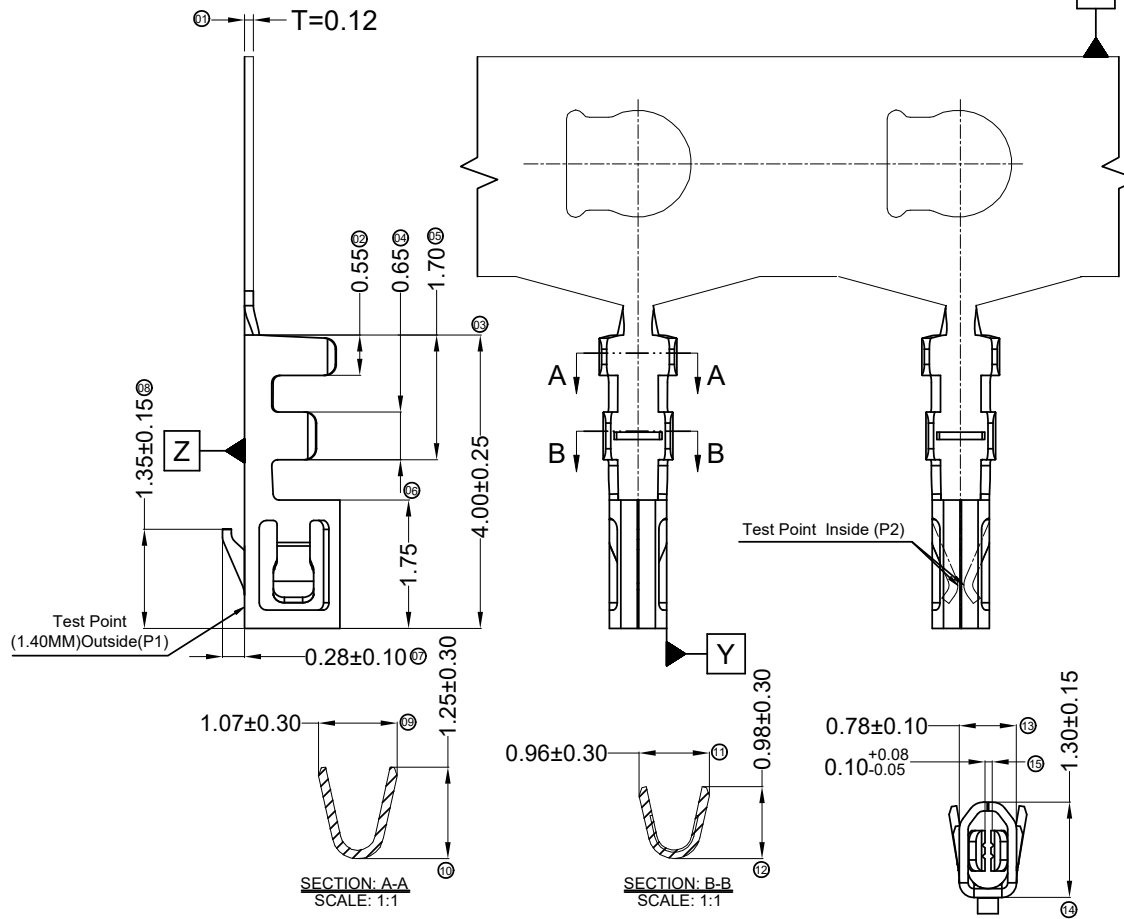


				一般公差 GENERAL TOLERANCE				料号 PART NO			
				. X ±0.3				M1001T			
				. XX ±0.2				品名 TITLE			
				. XXX ±0.1				1.00mm Crimp Style Connectors			
2011/05/14	A	B	修改图框格式	审核 CHK	核准 APPD	角法 PROJECT	东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd	核准 APPD	审核 CHK	绘图 DR	日期 DATA
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT		SUCCESS	刘艳	2007/05/03	
1	2	3	4	5	6	7	8	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER A-069	版次 REV B


环保物料



2*08, Without Slot

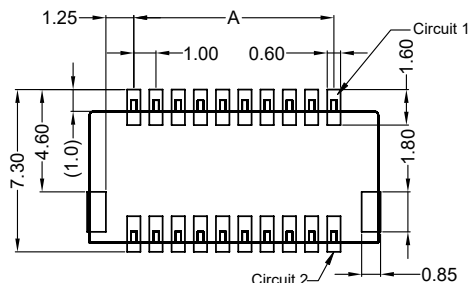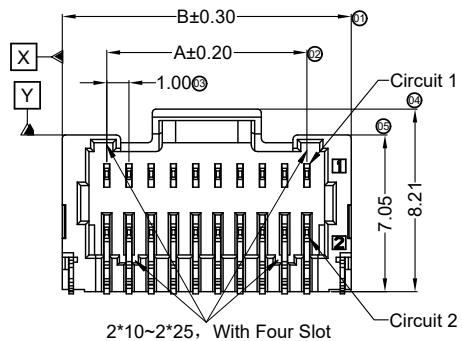

Recommended P.C.B Layout
General Tolerance ± 0.05



- Specifications :
- Voltage rating: 50V AC / DC
- Current rating: 1.0A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ
- Material(Pin): Phosphor Bronze
- Material(Solder Tabs): Brass
- Finish(Solder Tabs): Matte Tin Plating
- Mates With HHB Housing: 1001H-2*XX










Poles	Dimensions (mm)	
	A	B
2*08	7.00	11.00
2*10	9.00	13.00
2*12	11.00	15.00
2*15	14.00	18.00
2*20	19.00	23.00

						一般公差 GENERAL TOLERANCE . X ±0.3 . XX ±0.2 . XXX ±0.1	东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd				料号 PART NO M1001WRS-2*XX					
											品名 TITLE					
											1.00mm Crimp Style Connectors					
2011/05/14	A	B	修改图框格式				核准 APPD		审核 CHK	绘图 DR	日期 DATA					
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION		审核 CHK	核准 APPD	角法 	PROJECT		SUCCESS	刘艳	2007/05/03	单位 UNIT MM	比例 SCALE 1/1	图号 NUMBER A-069	版次 RE B

环保物料

■ Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 1.0A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 100\text{M}\Omega$
- Contact resistance: $\leq 20\text{m}\Omega$
- After environmental testing: $\leq 30\text{m}\Omega$
- Material(Pin): Phosphor Bronze
- Material(Solder Tabs): Brass
- Material(CAP): LCP UL 94V-0 Black
- Finish(Solder Tabs): Matte Tin Plating
- Mates With HHB Housing: 1001H-2*XX

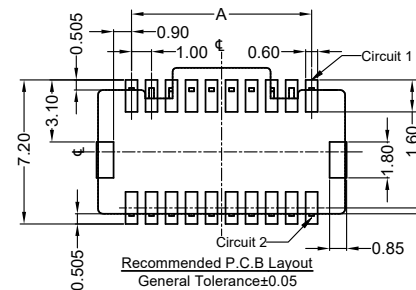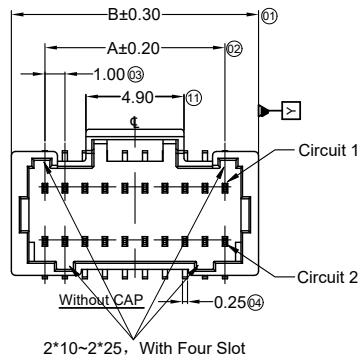

Poles	Dimensions (mm)	
	A	B
2*08	7.00	10.35
2*10	9.00	12.35
2*12	11.00	14.35
2*13	12.00	15.35
2*14	13.00	16.35
2*15	14.00	17.35
2*18	17.00	20.35
2*20	19.00	22.35
2*25	24.00	27.35

				一般公差 GENERAL TOLERANCE				东莞市翰皓精密电子有限公司 Dongguan HanHao Precision Electronics Co.,Ltd				料号 PART NO M1001WS-2*XX			
				.X ±0.3 .XX ±0.2 .XXX ±0.1				核准 APPD 审核 CHK 绘图 DR 日期 DATA				品名 TITLE 1.00mm Crimp Style Connector			
2011/05/14	A	B	修改图框格式					SUCCESS 刘艳 2007/05/03				单位 UNIT 比例 SCALE 图号 NUMBER 版次 REV			
日期 DATE	旧版次 OLD REV	新版次 NEW REV	变更内容 DESCRIPTION	审核 CHK	核准 APPD	角法 PROJECT						MM	1/1	A-069	B